

BAS-3 Acties uitgevoerd na 11 $\frac{3}{4}$ " val

Presentatie SodM
15 maart 2013


Inhoud

- Acties uitgevoerd na val 11 $\frac{3}{4}$ "
- Huidige status en plannen
- Afsluiten cavernes in het algemeen

Acties uitgevoerd na val 11 $\frac{3}{4}$ "

BAS-3 Cavern Abandonment

Phase 1, addendum v3_15 Dec-2012

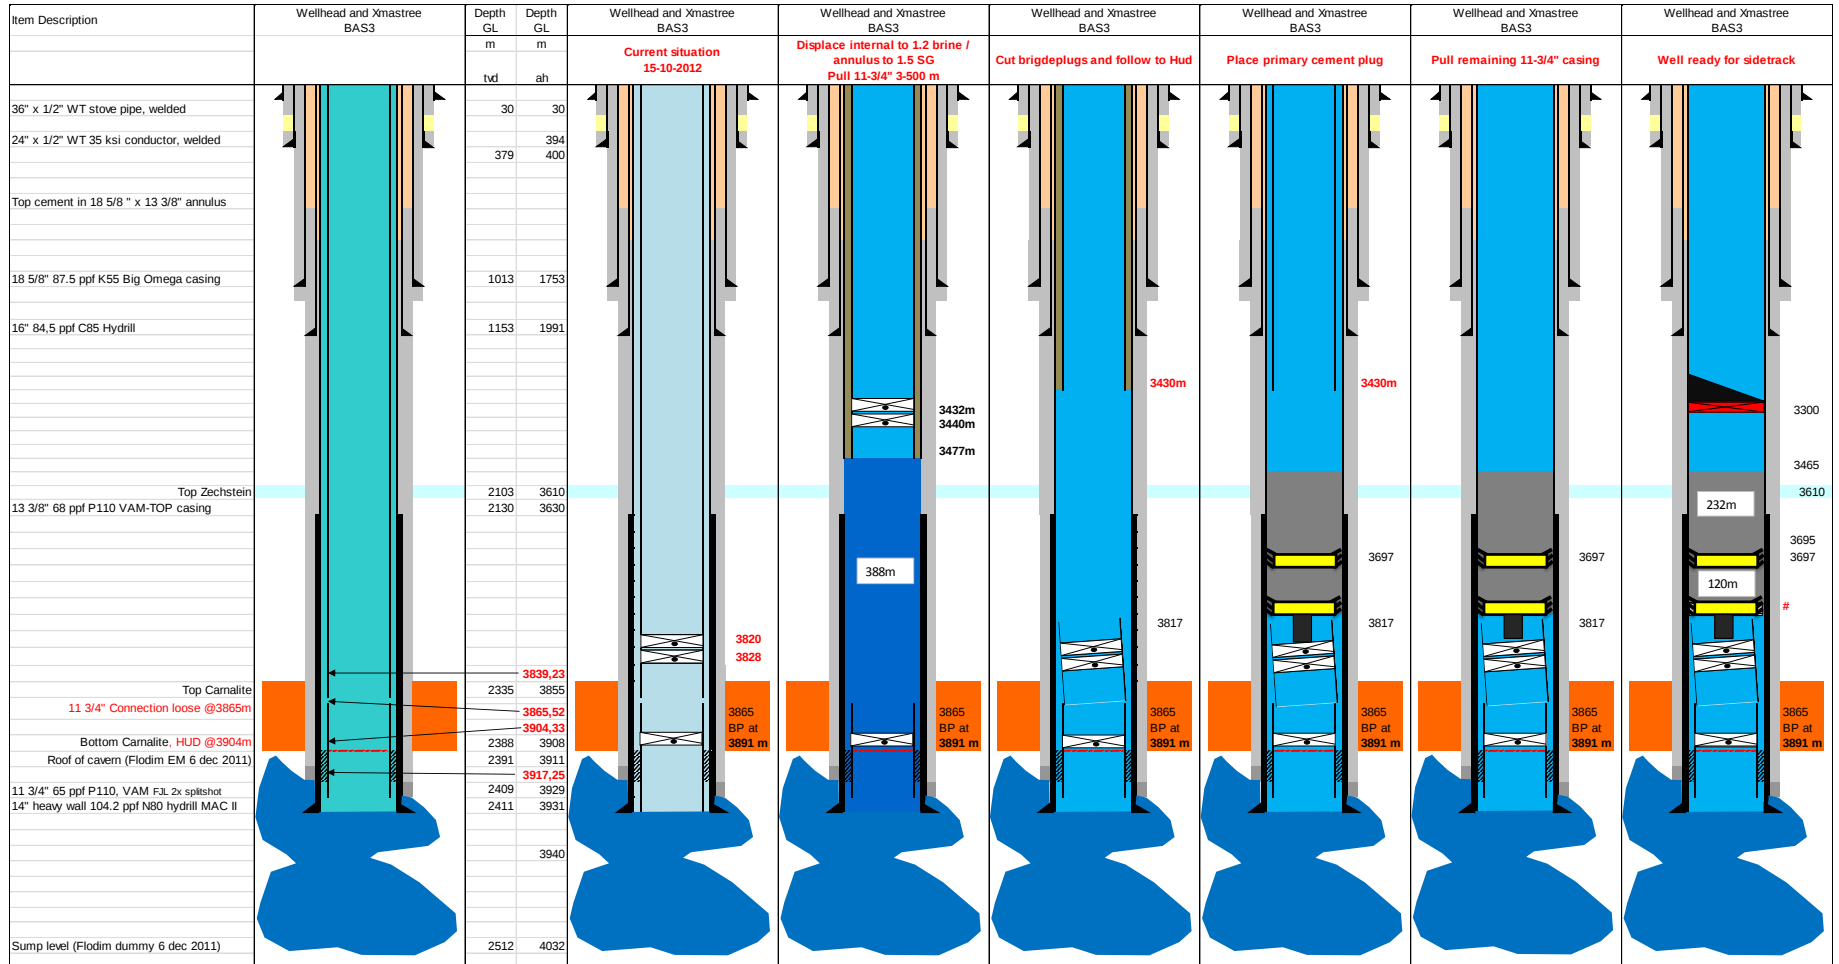

20-Feb-2012

[illegible]

Dropped 11 $\frac{3}{4}$ "

- Options:
 - Fish 11 $\frac{3}{4}$ "
 - Cement bottom 11 $\frac{3}{4}$ " to close off cavern
- Decision factors
 - Technical succes (weight 11 $\frac{3}{4}$ ")
 - Condition 13 $\frac{3}{8}$ "
 - Safety

Stinger assembly

Item Description	Wellhead and Xmastree BAS3	Depth GL	Depth GL
		m tvd	m ah
	Stinger		
36" x 1/2" WT stove pipe, welded		30	30
24" x 1/2" WT 35 ksi conductor, welded		379	394
Top cement in 18 5/8" x 13 3/8" annulus			400
18 5/8" 87.5 ppf K55 Big Omega casing		1013	1753
16" 84.5 ppf C85 Hydrill		1153	1991
Top Zechstein		2103	3610
13 3/8" 68 ppf P110 VAM-TOP casing		2130	3630
Cut height			3825
Bridgeplug #3 (fitted w/ flapper valve)			3827
Bridgeplug #2 (fitted w/ flapper valve)			3835
			3839.23
Top Camalite		2335	3855
11 3/4" Connection loose @3865m			3865.52
Bridgeplug #1 (fitted w/ flapper valve)			3904.33
Bottom Camalite, HUD @3904m		2388	3908
Roof of cavern (Flodim EM 6 dec 2011)		2391	3911
			3917.25
11 3/4" 65 ppf P110, VAM F3L 2x splitshot		2409	3929
14" heavy wall 104.2 ppf N80 hydrill MAC II		2411	3931
			3940
Sump level (Flodim dummy 6 dec 2011)		4032	4032

Washing operations:


- Wash down to bridge plug.
- Retrieve Dart valves (WL).
- Reverse clean (rubber fragments)
- Stab-in stinger (no injectivity)
- Unstab reverse clean (salt)
- Wash with fresh water
- Injection test DP & Ann 500 l/min

Cement Job #1

Proposal Cement job #1:

Fast 40Bc @6:23 hr:mn
500psi @5:21 hr:mn
Slow 40Bc @8:43 hr:mn
500psi @30:47 hr:mn

Circulation Squeeze Plug UCA Plot – Fast Setting

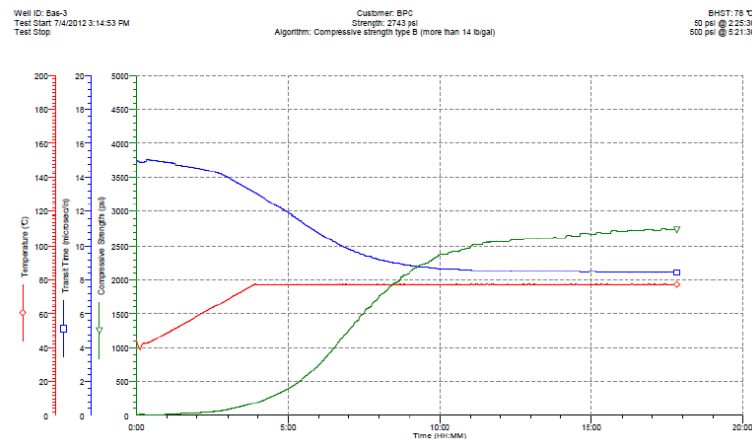


SCHLUMBERGER
COEVOORDEN

Test File Name: UCA_12-052-rebo_Bas-3_Plug_BPC.txt
Printed: 7/9/2012 9:04:06 AM

Page 1

Circulation Squeeze Plug UCA Plot – Slow setting

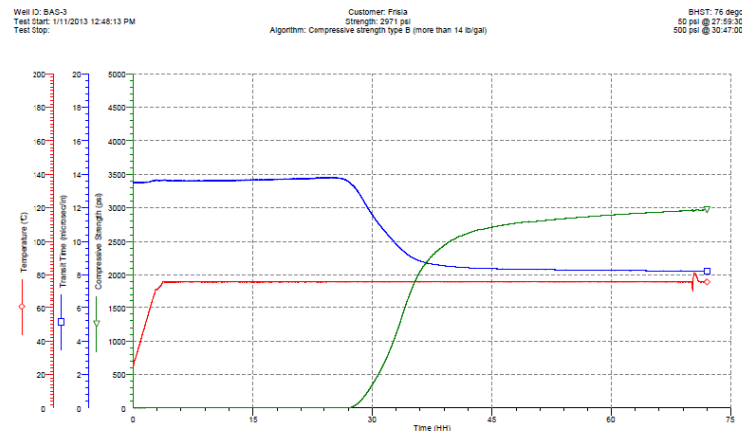

SCHLUMBERGER

Test File Name: UCA_13-007-76_Frisia_BPC_Bas-3_Plug (8.5L D081).txt
Printed: 1/14/2013 12:48:34 PM

Page 1

Presentation SodM 15 maart 2013

Your Partners in Value Creation


Actual CMT Job #1

- Pump 8m³ FW HiVis pill
- Pump 2m³ Fast setting cement
- Pump 3.9m³ Slow setting cement
- Place by injection
- Hesitation squeeze 4 x .25 m3
- WOC 17hr
- Ptest
- WOC 19hr

Schlumberger


Cementing Job Report

CemCAT v1.1

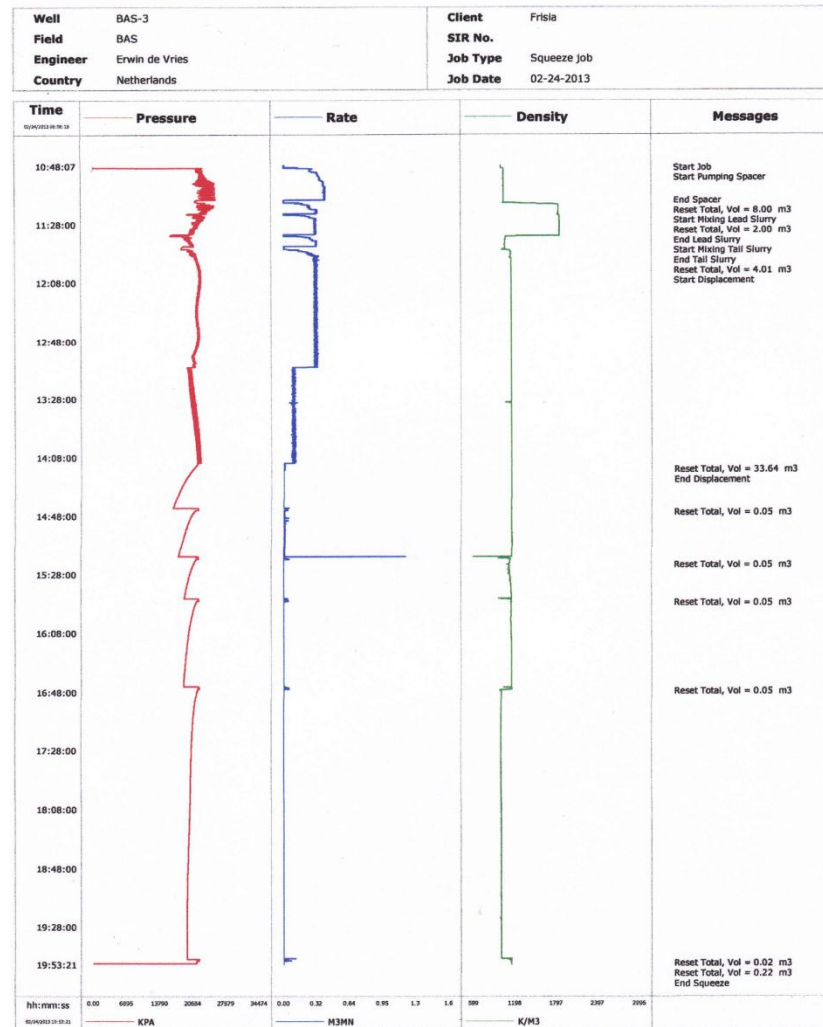

Presentation SodM 15 maart 2013

Samples & Interfaces

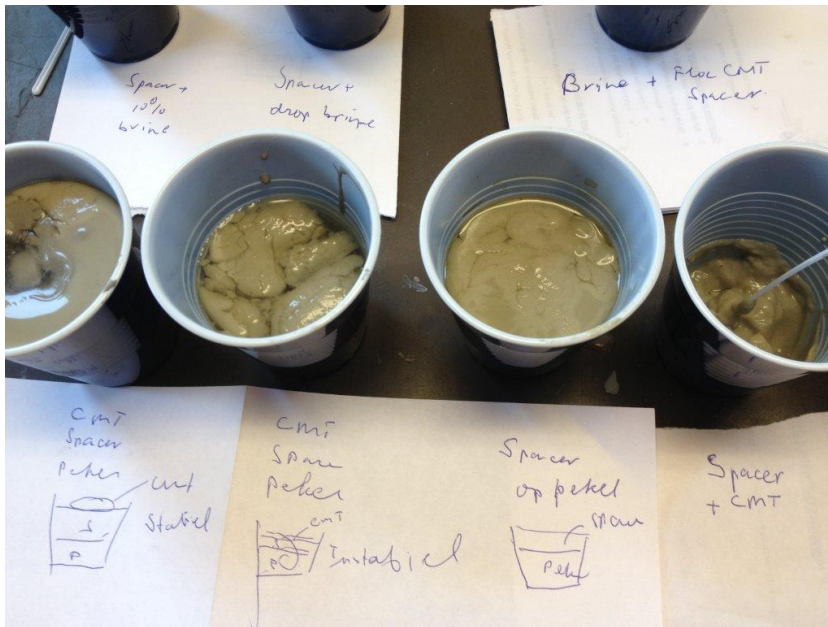


UCA 'Fast' Slurry


Well ID: BAS-3
Test Start: 1/25/2013 1:54:23 PM
Test Stop: 1/29/2013 11:22:36 AM

Customer: Frisia
Strength: 0 psi
Algorithm: Compressive strength type B (more than 14 lb/gal)

BHST: 78 degC
50 psi @ 23:38:00
500 psi @ 24:54:30

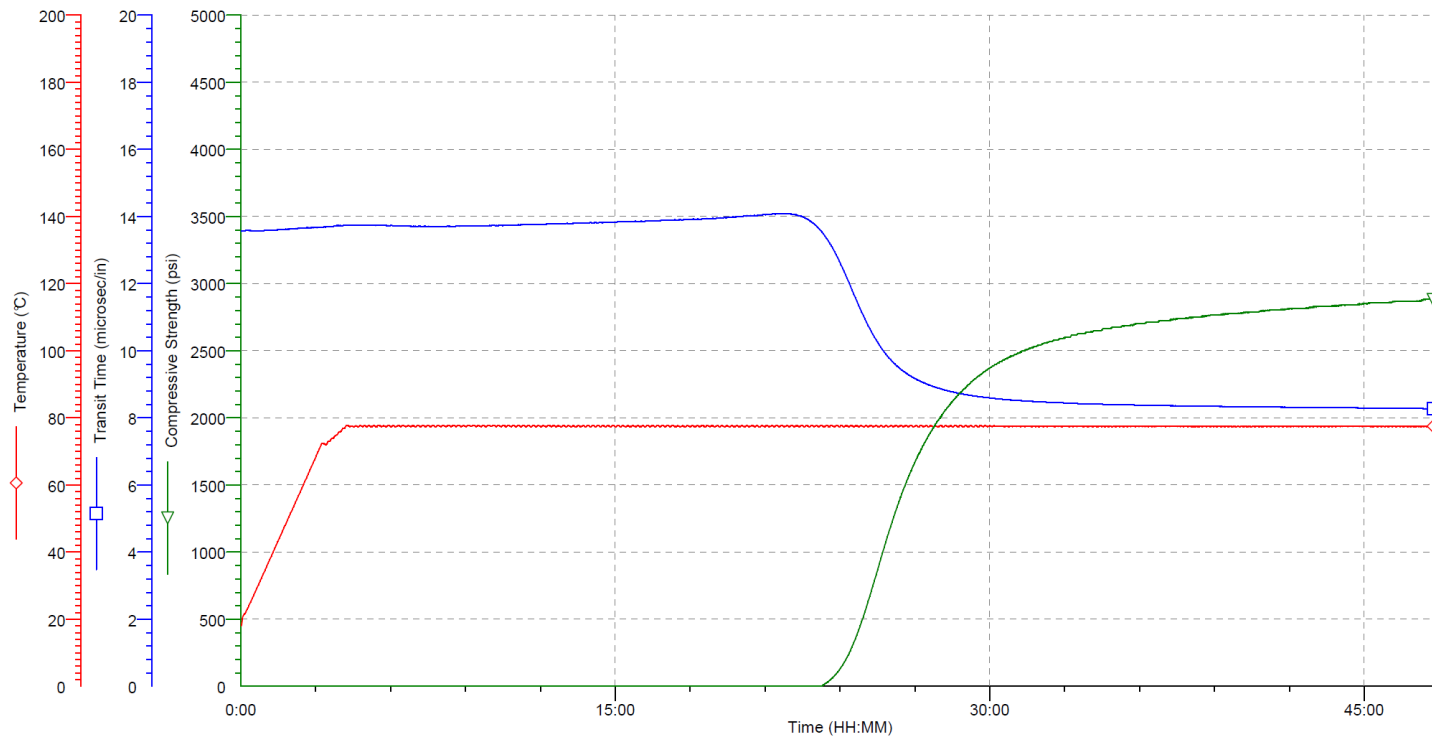


Status before CMT Job #2

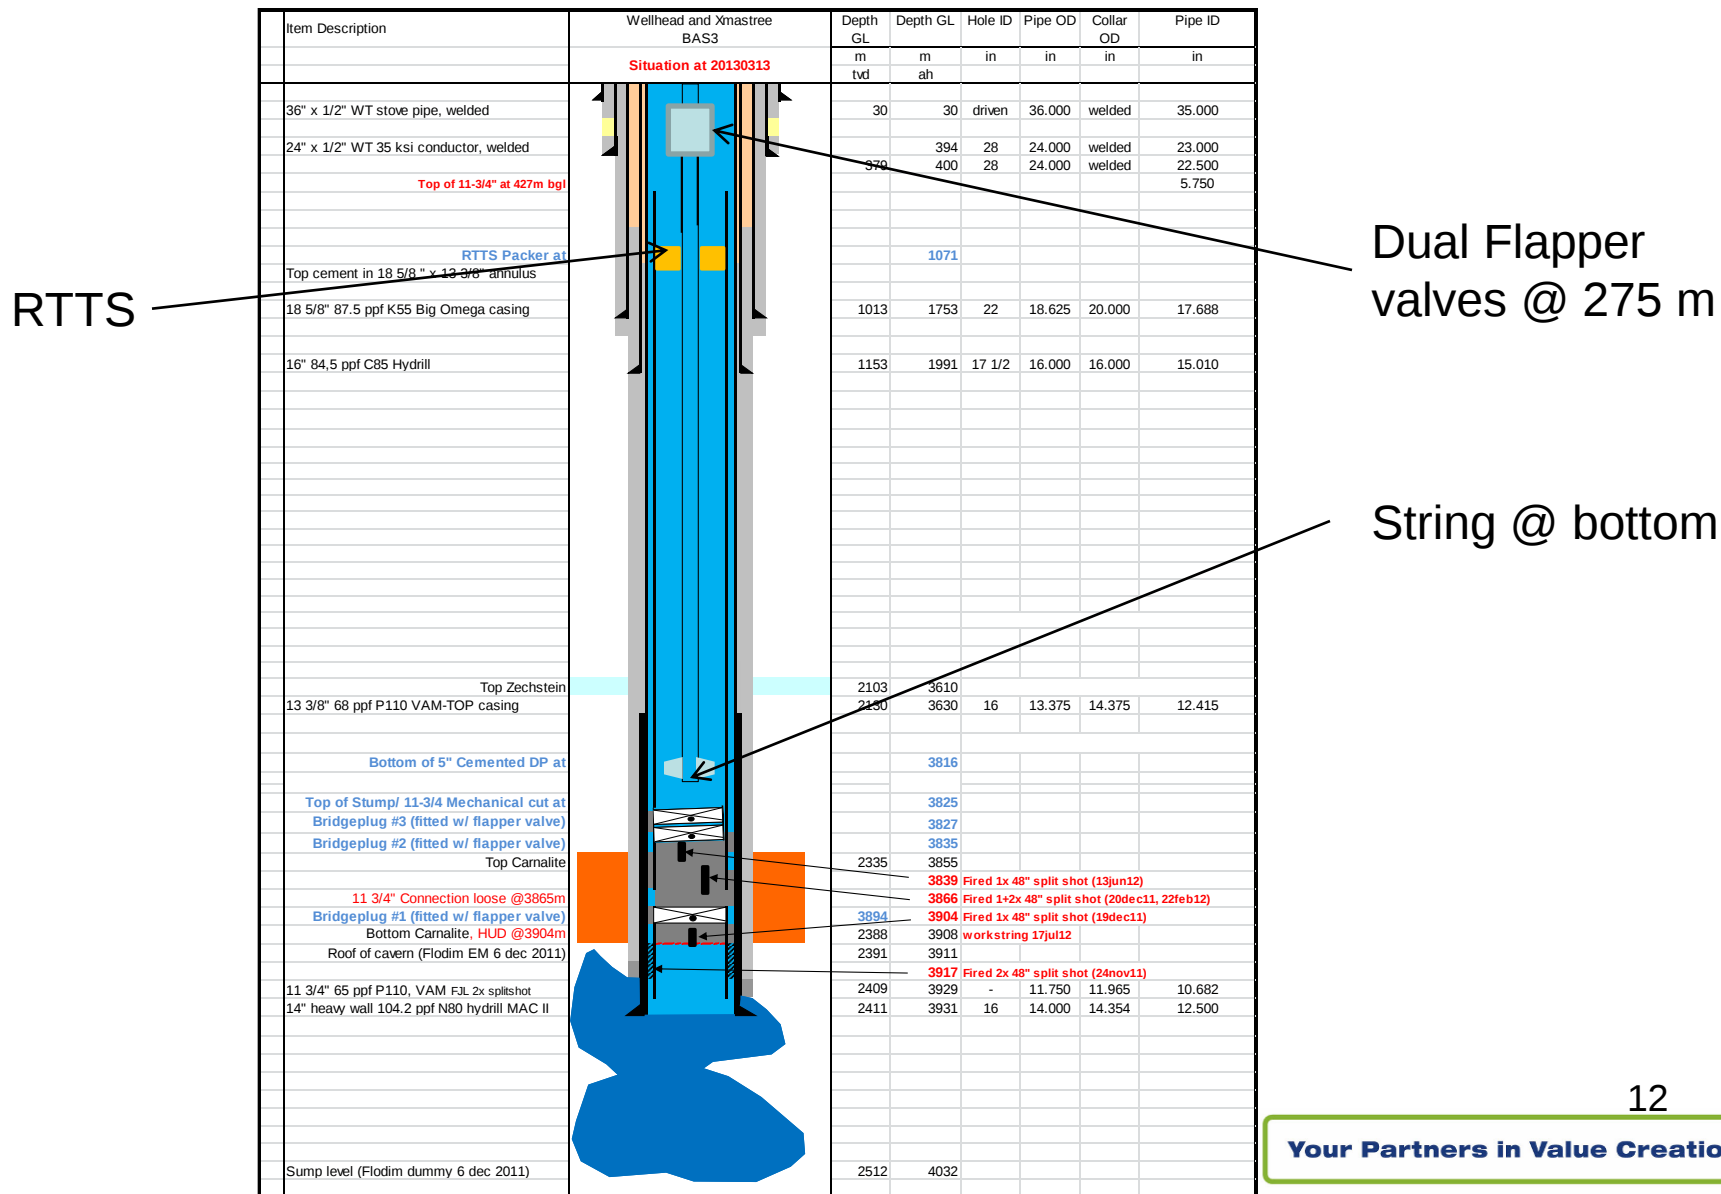


Conditions before CMT Job 2

- Stabbed in
 - no injectivity
 - bleed off not holding
- Stabbed out; RTTS set
 - Circ behind 11 3/4" 500 l/min
 - Injectivity via 11 3/4" ann 500 l/min
- Stabbed out, RTTS unset
 - Good communication via 'crack'




Pressures wellhead/DP during cementation

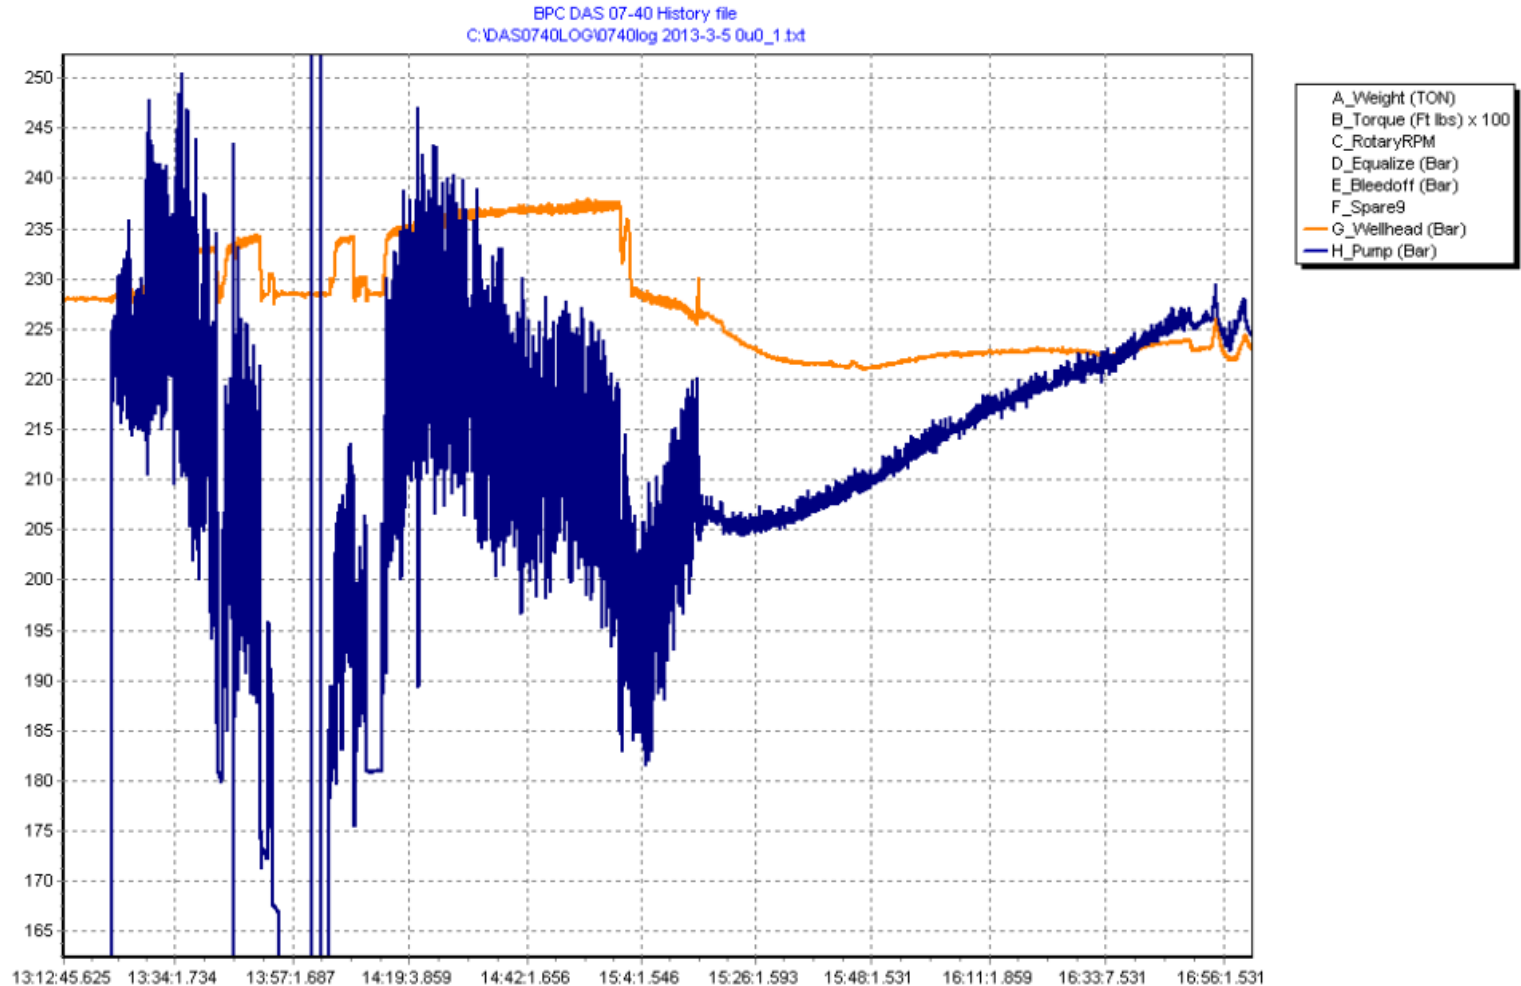

Pressure test after WOC #2

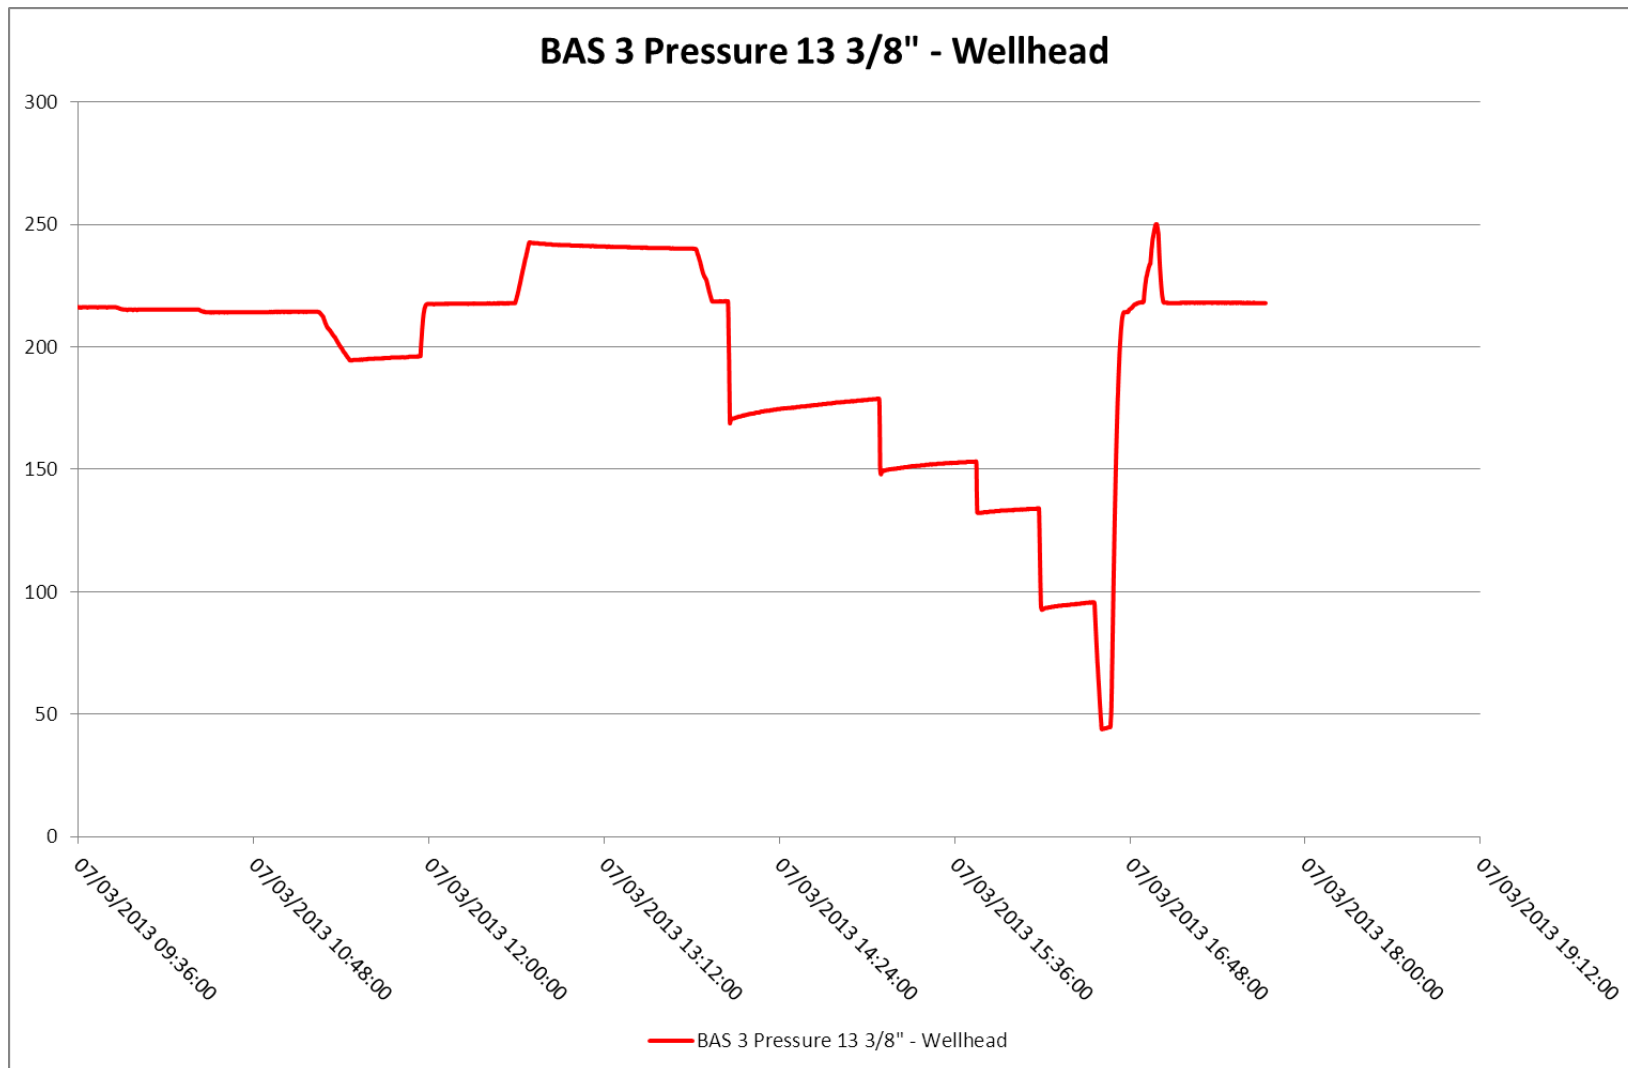


Flapper Sleeve and flapper hammer

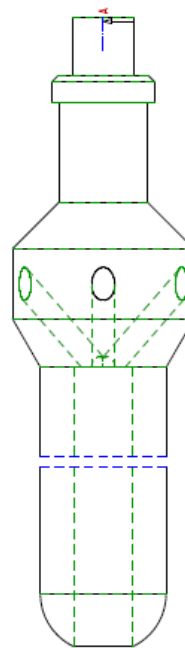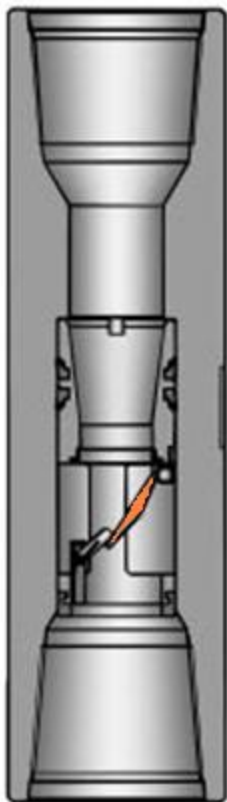

Pics flapper valves



Current situation

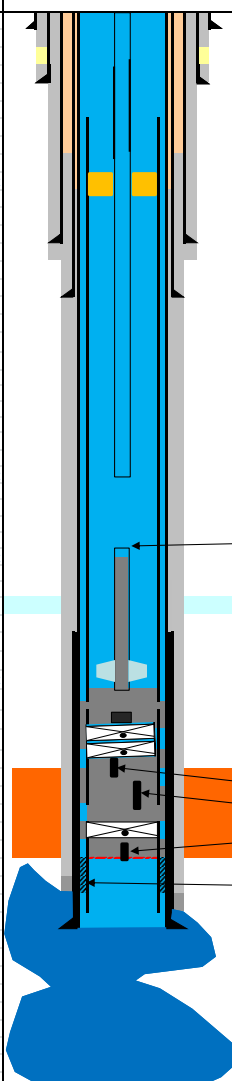
Item Description	Wellhead and Xmastree BAS3	Depth GL	Depth GL	Hole ID	Pipe OD	Collar OD	Pipe ID
		m tvd	m ah	in	in	in	in
Situation at 20130313							
36" x 1/2" WT stove pipe, welded		30	30	driven	36.000	welded	35.000
24" x 1/2" WT 35 ksi conductor, welded			394	28	24.000	welded	23.000
Top of 11-3/4" at 427m bgl		379	400	28	24.000	welded	22.500 5.750
RTTS Packer at			803				
Top cement in 18 5/8 " x 13 3/8" annulus							
18 5/8" 87.5 ppf K55 Big Omega casing		1013	1753	22	18.625	20.000	17.688
16" 84.5 ppf C85 Hydrill		1153	1991	17 1/2	16.000	16.000	15.010
Bottom of 5" DP at			3093				
Top of Cement in 5" DP at							
Top Zechstein		2103	3610				
13 3/8" 68 ppf P110 VAM-TOP casing		2130	3630	16	13.375	14.375	12.415
Bottom of 5" Cemented DP at			3816				
Top of Cement in 11-3/4"			Unknown				
Top of Stump/ 11-3/4 Mechanical cut at			3825				
Bridgeplug #3 (fitted w/ flapper valve)			3827				
Bridgeplug #2 (fitted w/ flapper valve)			3835				
Top Camalite		2335	3855				
11 3/4" Connection loose @3865m							
Bridgeplug #1 (fitted w/ flapper valve)			3894				
Bottom Camalite, HUD @3904m		2388	3908				
Roof of cavern (Flodim EM 6 dec 2011)		2391	3911				
11 3/4" 65 ppf P110, VAM FJL 2x splitshot		2409	3929	-	11.750	11.965	10.682
14" heavy wall 104.2 ppf N80 hydrill MAC II		2411	3931	16	14.000	14.354	12.500
Sump level (Flodim dummy 6 dec 2011)		2512	4032				

Free pipe with severing tool

Inflow test 11 3/4" cement, bled-off to 15bar, slow pressure increase to 25bar

Pressure test RTTS set

Load History

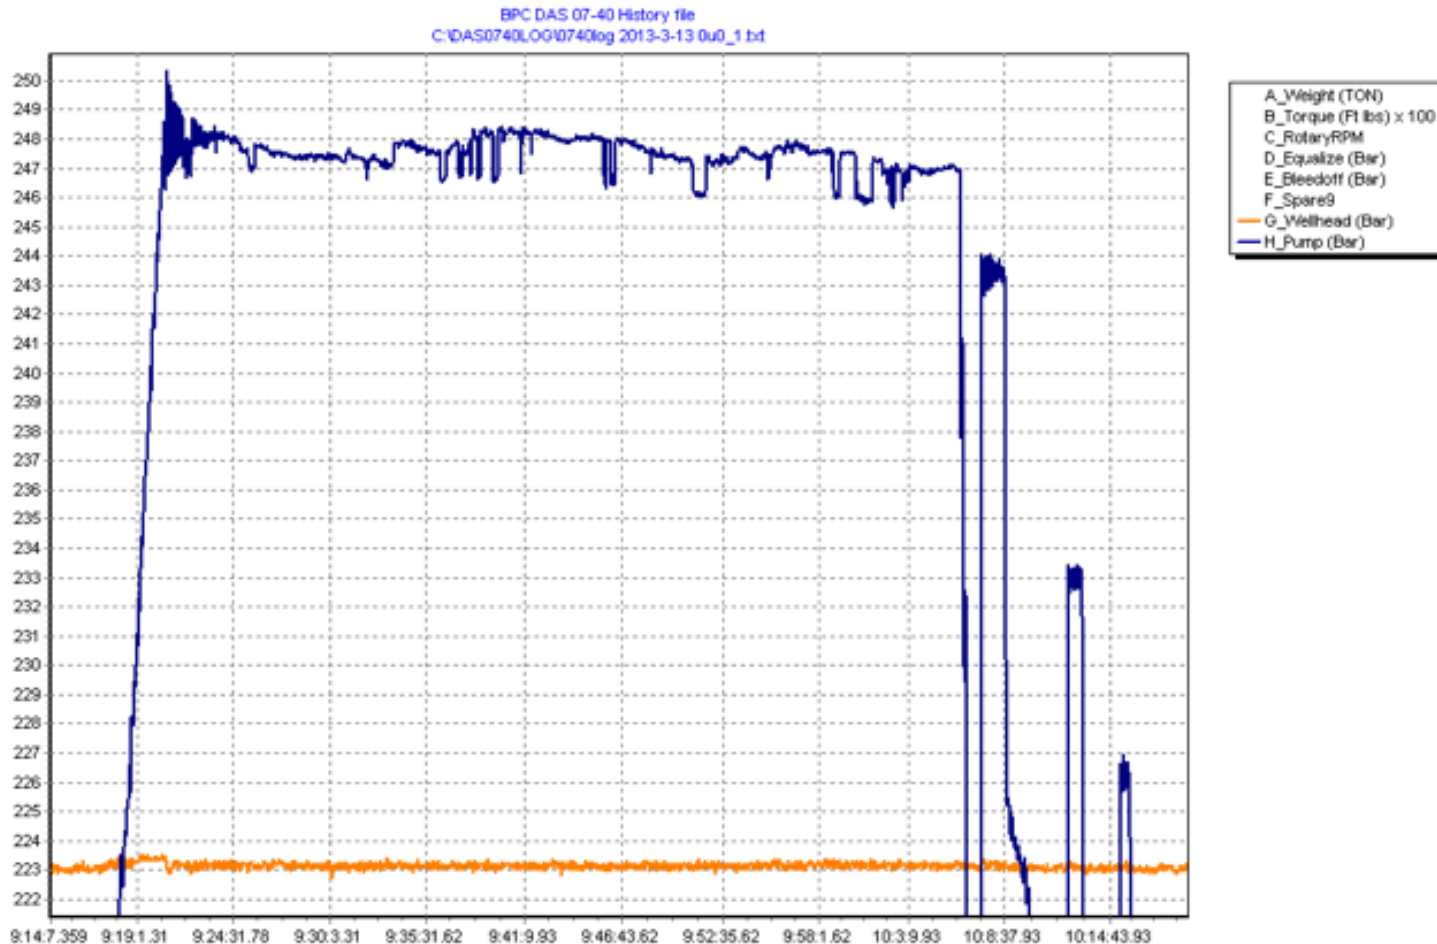


Presentation SodM 15 maart 2013

20


Inflow test RTTS set

Load History

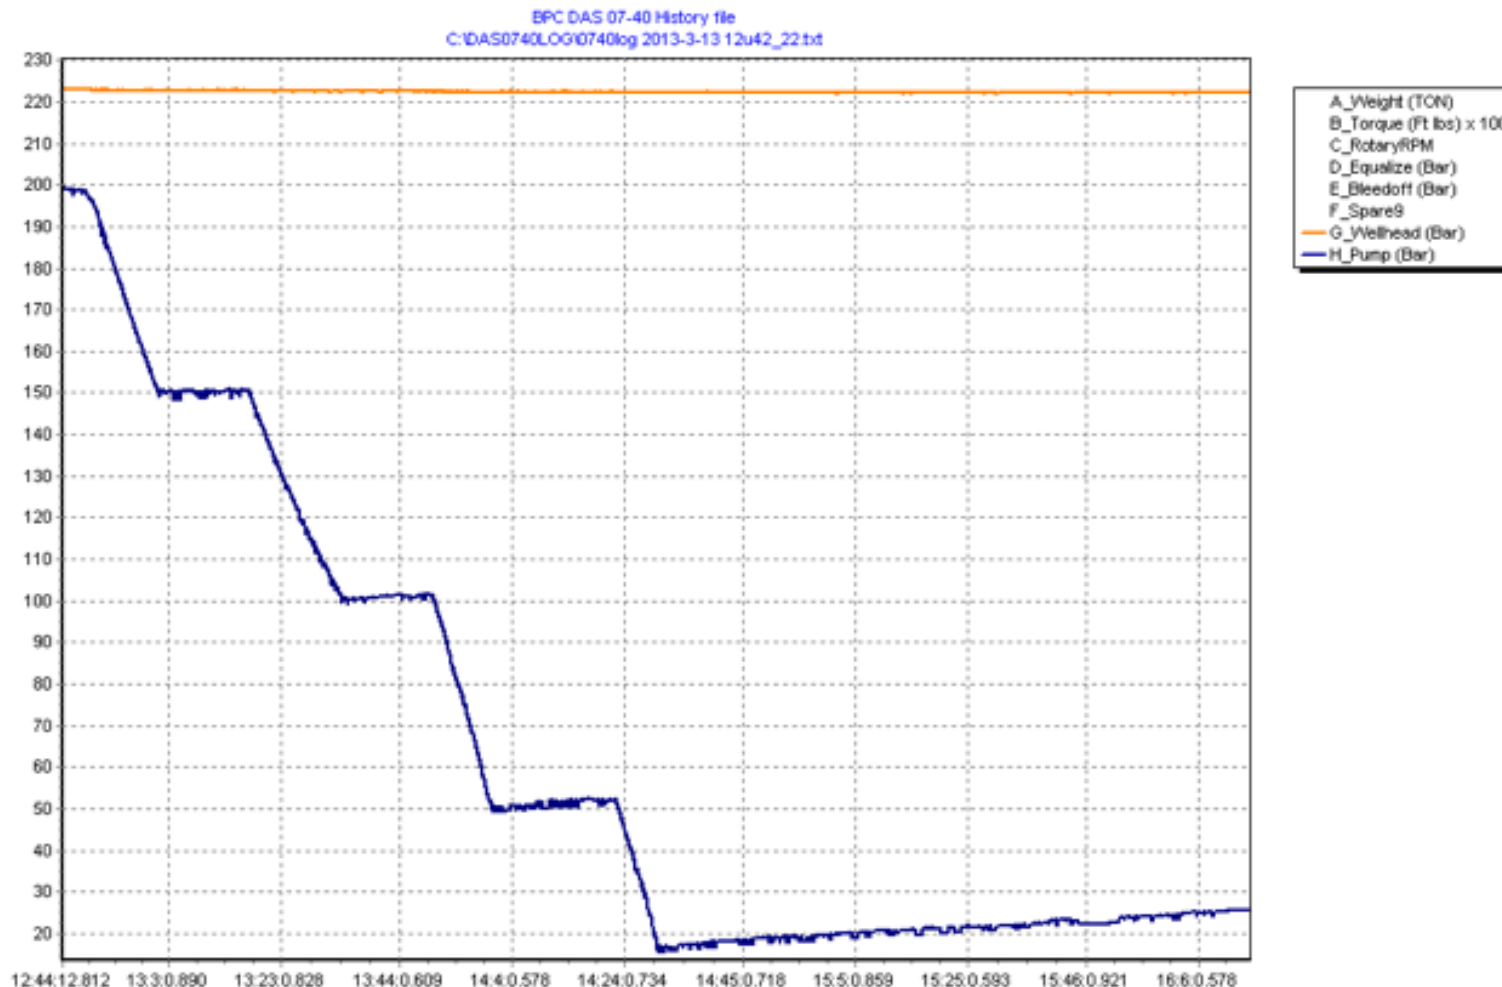

Injectivity test kill line RTTS not set


Load History

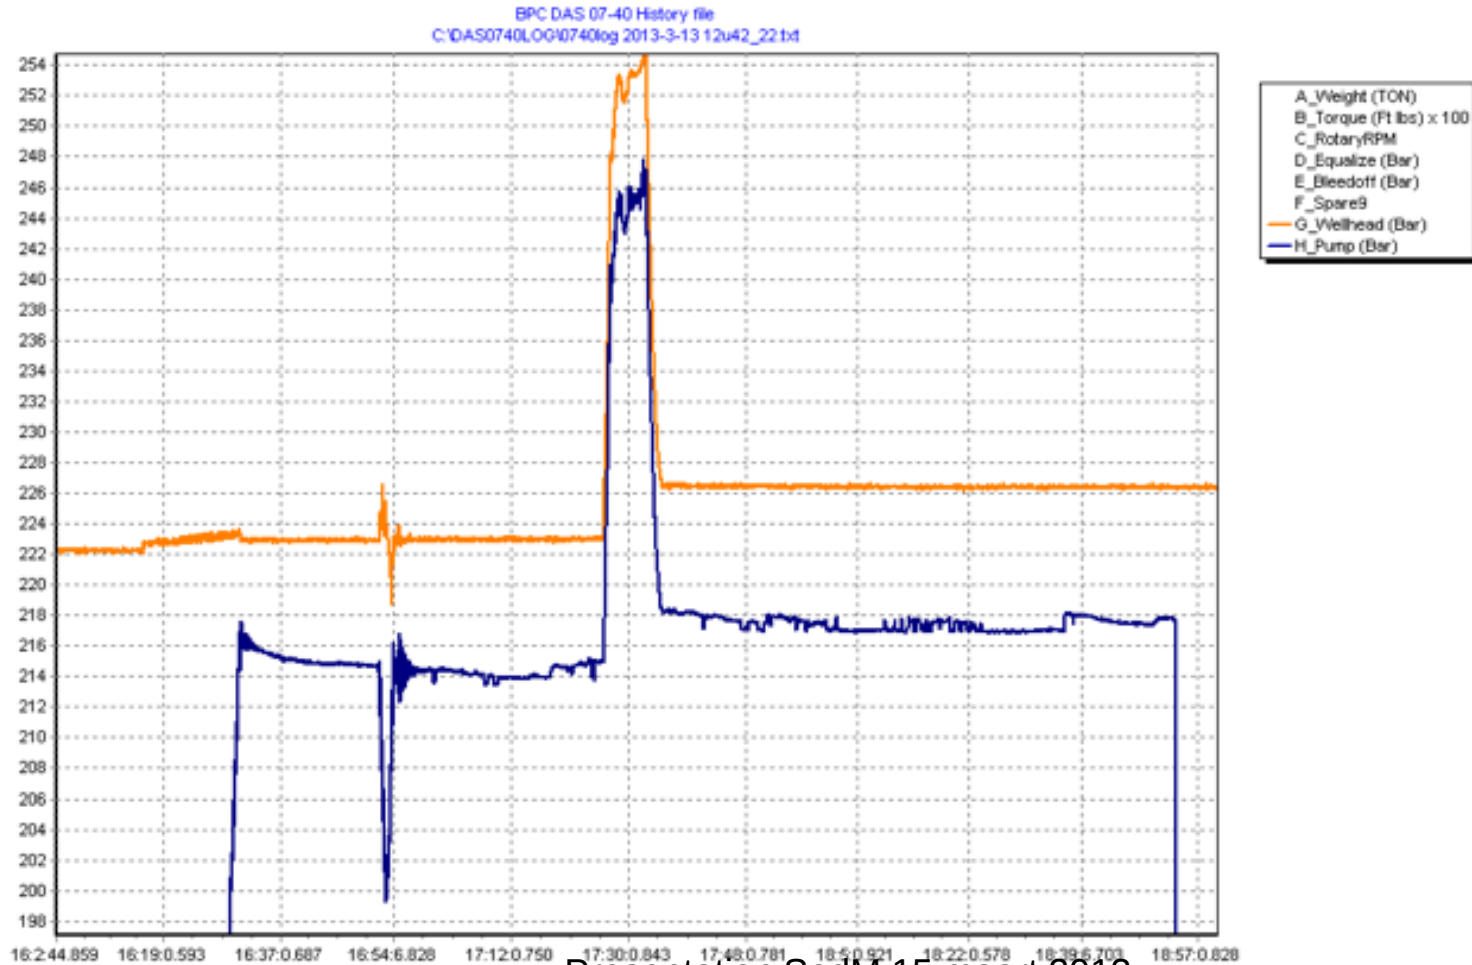

Presentation SodM 15 maart 2013

Huidige status en plannen

Item Description	Wellhead and Xmastree BAS3	Depth					
		GL m tvd	Depth GL m ah	Hole ID in	Pipe OD in	Collar OD in	Pipe ID in
Nipple 4 1/4"		30	30	driven	36.000	welded	35.000
36" x 1/2" WT stove pipe, welded							
24" x 1/2" WT 35 ksi conductor, welded			394	28	24.000	welded	23.000
		379	400	28	24.000	welded	22.500
Sliding side door at 425m Top of 11-3/4" at 427m bgl							5.750
Top cement in 18 5/8 " x 13 3/8" annulus							
18 5/8" 87.5 ppf K55 Big Omega casing		1013	1753	22	18.625	20.000	17.688
16" 84,5 ppf C85 Hydrill		1153	1991	17 1/2	16.000	16.000	15.010
5 1/2" 17# C95 TPS-techniseal 4 1/2", fitted with 4 1/4" nipple		1853	3300		5.500	6.075	4.992
Top of Cement in 5" DP at			3361				
Top Zechstein		2103	3610				
13 3/8" 68 ppf P110 VAM-TOP casing		2130	3630	16	13.375	14.375	12.415
Bottom of 5" Cemented DP at			3816				
Top of Cement in 11-3/4"			Unknown				
Top of Stump/ 11-3/4" Mechanical cut at			3825				
Bridgeplug #3 (fitted w/ flapper valve)		3827					
Bridgeplug #2 (fitted w/ flapper valve)		3835					
Top Carnalite	2335	3855					
11 3/4" Connection loose @ 3865m		3839					
Bridgeplug #1 (fitted w/ flapper valve)		3866					
Bottom Carnalite, HUD @ 3904m		3904					
Roof of cavern (Flodim EM 6 dec 2011)		3908					
11 3/4" 65 ppf P110, VAM FJL 2x splitshot	2409	3929	-	11.750	11.965	10.682	
14" heavy wall 104.2 ppf N80 hydrill MAC II	2411	3931	16	14.000	14.354	12.500	
Sump level (Flodim dummy 6 dec 2011)	2512	4032					

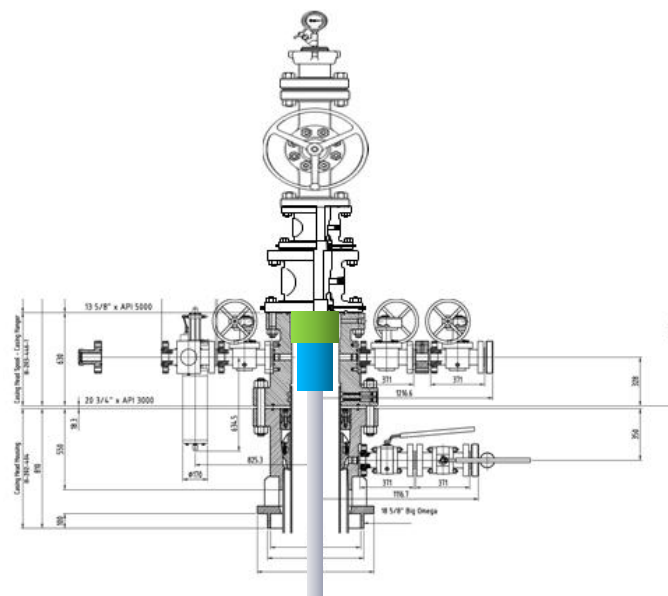

- Hanger
- X-over
- 5 1/2" casing

Top down cementation via 11 3/4" x 13 3/8" annulus

Your Partners in Value Creation

BAS-3 Phase 1a

Chronology

- 3-Jan Displace 13 3/8" to heavy brine
- 4-Jan Pull 400m 11 3/4", PUW initial 150mT final 115mT, equalize pressures,
- 5- Jan attempt to push down, at 75mT two locking bolts of HWO unit broke.
- 6-11Jan Repair/improvements
- After repair:
 - 14-Jan Push down 11 3/4" with 60mT
- 18-Jan Perform cut on 11 3/4"
- 24-Jan Snub in hole cementing BHA, with BHA at 256m the 11 3/4" **dropped**, continued snub in hole HUD at 366m
- 26Jan-01Feb wireline, fish plugs, asses downhole situation with multi-finger caliper. Around 366m min ID 11.983" (wrong data)
- 02-16Feb, drift run 13 3/8" & 11 3/4" with 10 3/8" stab and 12 1/4" stab to top 11 3/4".

BAS-3 Phase 1a

- 17-20Feb, snub in hole stab-in stinger assembly.
- 21-22Feb, retrieve darts, injectivity-circulation tests.
- 23-25Feb, cement job #1 & WOC.
- 26-28Feb, bleed-off injectivity tests, reverse circulate string, re-install darts
- 1-2Mar, install RTTS packer in string
- 3Mar, injectivity/circulation tests.
- 4-6Mar, cement job #2 & WOC.
- 7Mar, inflow test at 50bar WHP breakthrough, DP stuck in cement.
- 8-10Mar, wireline, two severing shots to free pipe @3382m. TOC in pipe @3386m.
- 11Mar, wireline, set plug in DP (bridge plug & cement)
- 12Mar, WOC, snub out of hole, retrieve float subs/valves
- 13Mar, inflow test cement inside 11 3/4",
- 14Mar, Standby

Afsluiten cavernes in het algemeen

Discussie