

The Annual Mercury Monitoring Report 2015 NAM and GTS

NAM Document Details

Document Reference	EP201512200261	
Authors	5.1.2.e (Process Engineering)	
Reviewers	5.1.2.e (Process Engineering) 5.1.2.e (Commercial)	5.1.2.e
Approval	5.1.2.e (Process Engineering)	Paraph

GTS Document Details

Document Reference	Meetprogramma 2015 (DNV GL)	
Authors	5.1.2.e (Gaskwaliteit Gasunie)	
Approval	5.1.2.e (Metering & Allocation)	Paraph : 5.1.2.e

Revision Details

Current Revision	Final 2015 - April 2016
Previous Revision	Final 2014 - January 2015

Contents

Section 1: Measurements	3
NAM Measurement Plan	3
NAM Measurement Results by Plant Type	3
Transfer Stations Schematic	3
Transfer Stations Results.....	3
LTS Clusters	5
Underground Storages.....	5
GTS Measurement Plan	6
GTS Measurement Results by Unit Type	6
High Pressure Grid: (HTL).....	6
The Intermediate Pressure Grid: (RTL)	7
Section 2: Analysis.....	8
Total Transfer Stations:.....	8
Individual Transfer Stations	8
Tjuchem Zuid-2	8
Section 3: Regulations.....	11
NAM & GTS	11
Introduction	11
REACH/CLP	11
Best Available Technique (BAT)	11
Minimization Principle: ('minimalisatieverplichte stof').....	12
The Occupational Exposure Limit	13
Private Households: RIVM Tolerable Concentration in Air.....	13

Section 1: Measurements

NAM Measurement Plan

NAM has agreed to conduct the tests as part of the "Joint Principles for Conducting Mercury Monitoring in Sales Gas". Please refer to document EP201601204309, Revision 1.

NAM Measurement Results by Plant Type

Transfer Stations Schematic

Below is a schematic of the configuration of Transfer Stations on the Groningen Ring.

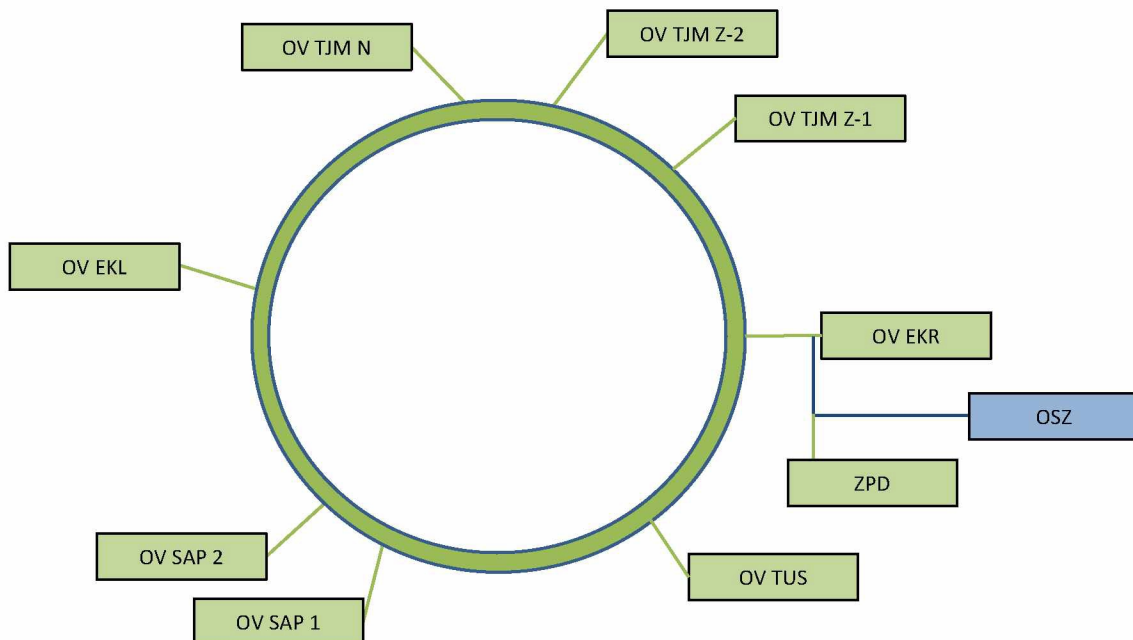


Figure 1: Groningen Ring Schematic (Green is NAM, Blue is GTS)

Oude Statenzijl, OSZ, is a GTS governed transfer facility for Groningen gas fed by both transfer station De Eeker and location Zuiderpolder.

Transfer Stations Results

The table shows measurements of mercury concentrations in sales gas for 2015, as measured at the Transfer Stations on the Groningen Ring. New is the measurement at the outlet header of location Zuiderpolder, which is compliant with the specification. Since start up of the Norgon pipeline, sales gas transfer at station SAP-1/2 is not used any more. During the injection season the station is closed to maximize injection capacity, and during the winter season transfer is maximized at the Norg station and at TUS station for clusters. Therefore, sales gas at station SAP-1/2 could not be tested.

All results are within the indicative mercury quantity in sales gas.

Transfer Station / Overslag		Measurement [$\mu\text{g}/\text{Nm}^3$]			
Location	Acronym	Value	Month/Year	Value	Month/Year
Tjuchem	TJM Z-1	11,0	10/2015	6,6	3/2015
Tjuchem	TJM Z-2	10,0	10/2015	7,9	3/2015
Tjuchem	TJM N	4,2	10/2015	3,6	3/2015
De Eeker	EKR	3,9	10/2015	0,3	3/2015
Tusschenklappen	TUS	3,3	11/2015	4,9	3/2015
Sappemeer	SAP 1	(1)	12/2015	(1)	(1)
Sappemeer	SAP 2	(1)	12/2015	4,9	3/2015
Eemskanaal	EKL	4,2	10/2015	8,6	3/2015
Zuiderpolder (3)	ZPD	9,9	11/2015	(2)	(2)
(1) Transfer station SAP was used less than 3% of time and, when used, was used very unscheduled. (2) Measurement was not yet in schedule (3) This is the outlet header at the production location ZPD					

Table 1: Transfer Station Mercury Measurement Results

LTS Clusters

The table below shows measurements of mercury concentrations in sales gas according to the monitoring principles in EP201601204309, revision 1, as measured at the outlet of the LTS units of the clusters. From the measurements, one for each LTS unit, the minimum and maximum measurement and average for the measurements from all LTS units is given. The Loppersum area clusters (LOPPZ: Leermens, Overschild, De Paauwen, Ten Post and 't Zandt) are production restrained which results in only one LTS unit being in production at any time. Location De Paauwen has not been in production since Q2 2015, and location Amsweer will be sampled early 2016.

Location	Code	Measurement [ug/Nm3]			Month/Year
		Average	Minimum	Maximum	
Ten Post	POS	8,4	(1)	(1)	10/2015
t Zand	ZND	6,9	(1)	(1)	10/2015
Leermens	LRM	9,1	(1)	(1)	10/2015
De Paauwen	PAU (2)	11	7,6	13	12/2013
Overschild	OVS	5,0	3,6	7,3	10/2013
Bierum	BIR	5,0	3,7	6,2	11/2013
Tjuchem	TJM	14	13	15	11/2015
Oudeweg	OWG	8,5	5,5	11	10/2015
Schaapbulten	SCB	8,6	7,4	9,6	2/2014
Zuiderpolder	ZPD	11	10	13	2/2014
Zuiderveen	ZVN	11	11	11	2/2014
Eemskanaal	EKL	8,8	8,1	10	2/2014
Kooipolder	KPD	13	12	14	10/2015
Amsweer	AMR (2)	10	8,4	11	9/2013
Siddeburen	SDB	12	11	13	5/2014
Scheemderwaag	SZW	13	13	14	9/2015
Spitsbergen	SPI	13	12	14	6/2014
De Eeker	EKR	12	11	13	9/2015
Slochteren	SLO	13	13	14	1/2014
Tusschenklappen	TUS	12	10	14	9/2015
(1) LOPPZ cluster; Due to production restraint only one LTS unit in production					
(2) Measurement was scheduled in Q4. Cluster was not in production; To be rescheduled					

Table 2: Cluster Mercury Measurement Results

Underground Storages

Measurements for both UGS's have been performed in 2015.

The below table shows the last test results for gas from the UGS's, and the measurement date. It is noted that the November 2015 mercury level of NORG production gas is slightly above historic levels, however conform Groningen level and the next measurement is scheduled for Q2 of 2016.

Location	Measurement [ug/Nm3]	Month/Year	Measurement [ug/Nm3]	Month/Year
GRK (Production)	-	-	< 0,3	3/2015
NORG (Production)	3,3	11/2015	9,2	3/2015

Table 3: UGS Mercury Measurement Results

GTS Measurement Plan

GTS has agreed to conduct the following tests as part of the Joint Principles for Conducting Mercury Monitoring in Sales Gas:

Unit Type	Indicative Mercury Quantity in Sales Gas	Sampling Frequency	Plants
HTL - North-South pipeline corridor - North West pipeline corridor	< 15 µg/m ³ (n)	Once per year.	North-South pipeline corridor at CS. Ommen North-West pipeline corridor at CS. Wieringermeer
RTL - Pipeline M&R Scheemda – GOS Nieuweschans	<15 µg/m ³ (n) (M&R Scheemda) < 5 µg/m ³ (n) (GOS Scheemda) < 2 µg/m ³ (n) (GOS Hoorntjesweg, GOS Nieuweschans)	Once per year	Measurements are carried out at M&R Scheemda, GOS Scheemda, GOS Hoorntjesweg GOS Nieuweschans Remark: M&R Scheemda is situated downstream of OV De Eeker

Table 4: GTS Tests

GTS Measurement Results by Unit Type

High Pressure Grid: (HTL)

GTS has conducted the agreed measurements on the High Pressure Grid (HTL) in 2015. The measurements at the North-West pipeline corridor have not been taken at Wieringermeer but at Oldeboorn to accommodate for possible reverse flow from Wieringermeer towards Oldeboorn. In Oldeboorn the gas is always flowing in an East to West direction.

The High Pressure Grid is split into in a network transporting Groningen gas (G-gas) and a network transporting High Calorific gas (H-gas). This report focusses on G-gas. The measured values are:

A541 C.S. Oldeboorn : 76.7 ng/m³(n)
A540 C.S. Oldeboorn : 5042 ng/m³(n)
C.S. Ommen : 5539 ng/m³(n)

All results are less than the indicative mercury quantity in sales gas. Figure 1: Test Results RTL Network, µg/m³(n)

The Intermediate Pressure Grid: (RTL)

GTS has conducted the measurements on the Intermediate Pressure Grid (RTL) in 2015.

G-gas passes from the High Pressure Grid to the Intermediate Pressure grid at the Metering and Pressure control stations (M&R). G-gas then travels through the pipeline network, before exiting the the Intermediate Pressure Grid via a Metering and Fiscal Measuring Station (GOS). At this station, gas is metered and the pressure is adjusted.

Below is a schematic of the flow of gas through the intermediate pressure grid.

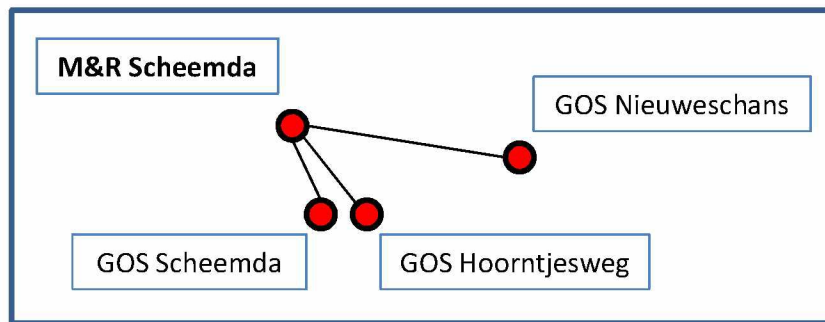


Figure 2: RTL Schematic

The table shows measurements of mercury concentrations in gas for the past years. All results are within the indicative mercury quantity in sales gas.

Location	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015
M&R Scheemda	11,9	5,7	9	/	3,7	12	6,2	10,7	5,3	5,9	2,2
GOS Scheemda	0,6	0,2	3,8	/	0,5	0	0,3	0	0,2	1	0,0
GOS Nieuweschans	0,3	0,2	0,4	/	0,5	0	0,1	0,1	0	0	0,0
GOS Hoorntjesweg	0,1	0,4	0,5	/	0,3	-	-	0	0	0	0,0

Table 5: Test Results RTL Network, µg/m3(n)

Section 2: Analysis

This section provides commentary and analysis, based upon the results in Section 1.

Total Transfer Stations:

The average concentration of mercury in Groningen Sales Gas shows a stabling trend in 2015, relative to the previous year.

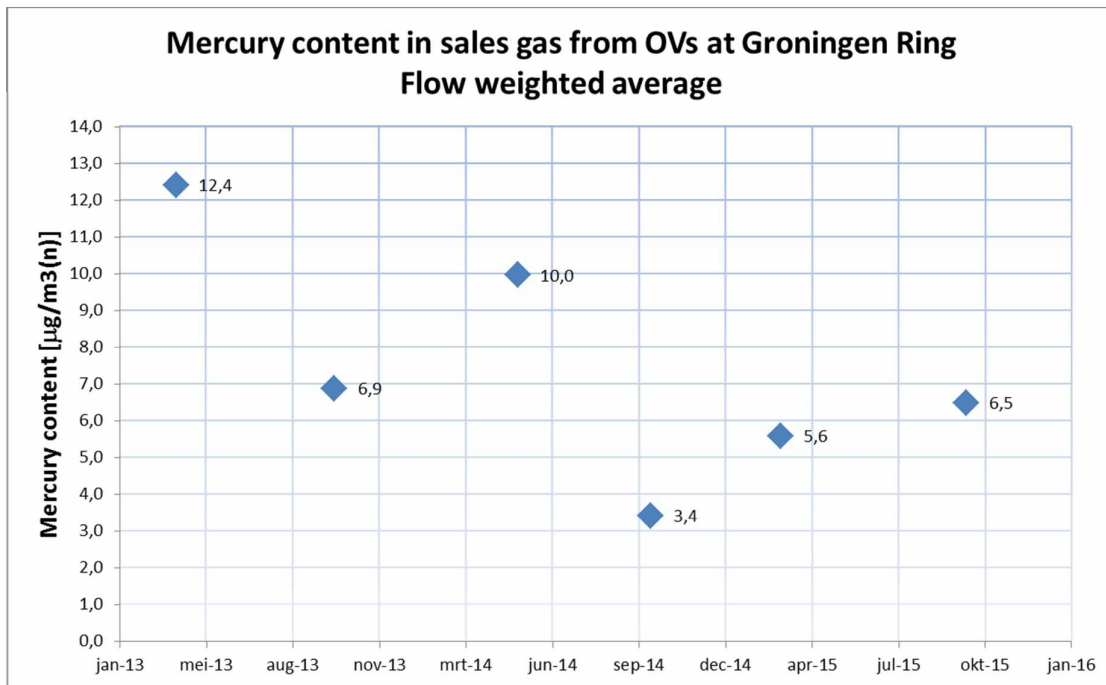


Figure 3: Flow Weighted Average Concentration of Mercury in Groningen Sales Gas

Individual Transfer Stations

Individual Transfer Stations and Cluster measurement results are discussed and drawn out for further commentary and analysis when above the Indicative Mercury Quantity.

Tjuchem Zuid-2

In Q2 2014, a sample of gas taken at Tjuchem Zuid-2 contained a concentration of mercury higher than the 15 $\mu\text{g}/\text{m}^3(\text{n})$ Indicative Mercury Quantity. The below graph shows the results of tests taken at TJM Z-2 since 2010.

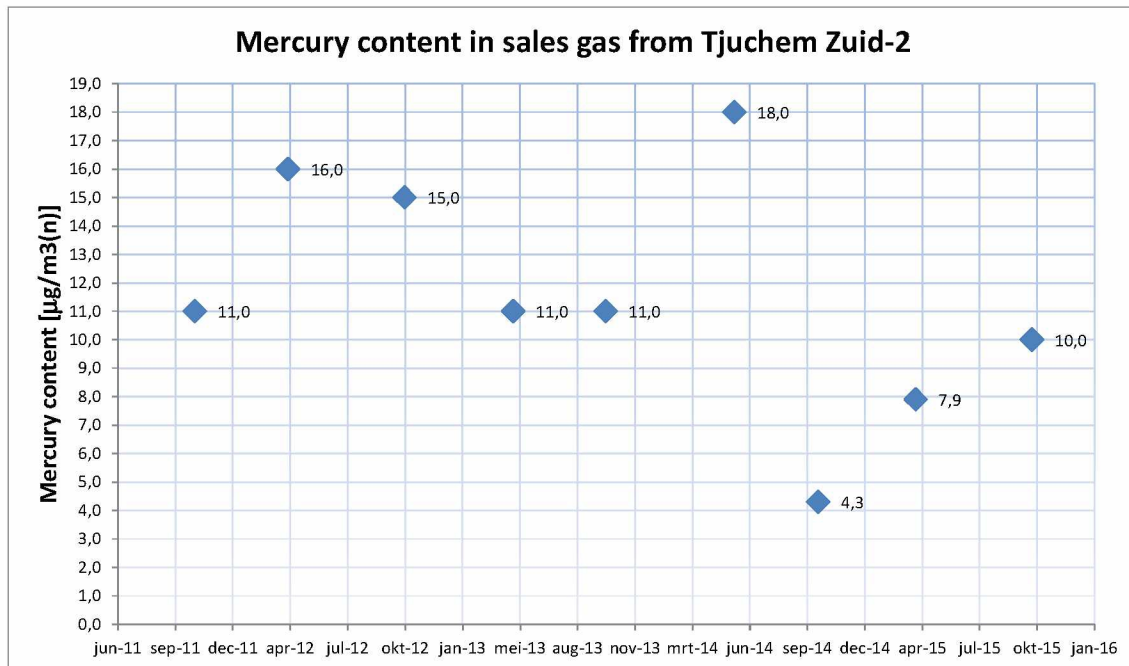


Figure 4: Graph showing Concentration of Mercury in Gas Tjuchem Zuid-2 (µg/m3(n))

“Deep Cooling” was implemented in the LTS units of the Groningen clusters in May 2013. For further details please refer to the Close out Report of the “Kwik Beheersing Studie”.

The result on the test in Q2 2014 was followed by three level measurements below the Indicative Mercury Quantity in Q4 2014. NAM could not identify the cause of the higher result in Q2-2014. No direct intervention was made to lower the concentration of mercury in gas.

Details of the conditions under which the two tests in 2014 were conducted are shown in the table below.

		Tjuchem Zuid-2	
Data Type	Unit	Test 1	Test 2
Test Result	µg/m3(n)	17.7	4.3
Test Date		14-05-2014	7-10-2014
Test Time		13:37	11:42
Production Level	mIn Nm3/d	24.2	13.9
Outside Temperature	°C	~ 12	~ 15
LTS Units Online	ref.#	# 1,3,4,5	# 1,2,3,4,5
Temperature	°C	-14	-14
Comment		No Intervention	

Table 6: TJM Z-2 Test Conditions

The range of results in 2014 is larger than in 2013 and 2015. The annual average is the same in 2013 and 2014, at 11 µg/m3(n). In 2015 the average has dropped to 9 µg/m3(n). The long term average mercury content in gas at the end of 2015 at TJM Z-2 is 11.6 µg/m3(n), down from 12.3 µg/m3(n) at the end of 2014.

CONFIDENTIAL

NAM notes that test 1 has both a higher mercury concentration, and a higher throughput. NAM will seek to plan a future test at a moment of high throughput, to test if these two items are correlated.

Section 3: Regulations

Note: There are no changes to this section with respect to the 2014 revision.

NAM & GTS

Introduction

The Joint Principles for Conducting Mercury Monitoring in Sales Gas require that NAM and GTS conduct a review of existing regulations relevant to mercury in sales gas. This is completed in this section of the report.

In the Netherlands, there is not a specific threshold on quantities of mercury in natural gas. However, there are other regulations that must be interpreted and adhered to. These are outlined below, together with NAM's status with regards to compliance.

REACH/CLP

NAM Status: Compliant

Reference: Regulation (EC) No 1907/2006

REACH is the European Regulation on chemicals and their safe use. It deals with the Registration, Evaluation, Authorisation and Restriction of Chemical substances. This regulation entered into force on 1st June 2007 and is implemented verbatim via the Dutch Environmental Management Act. The aim of REACH is to improve the protection of human health and the environment through better and earlier identification of the intrinsic properties of chemical substances. The REACH Regulation gives greater responsibility to industry to manage the risks from chemicals and to provide safety information throughout the supply chain on these substances. REACH also applies to mercury in sales gas.

According to REACH legislation, mercury as an individual component in natural gas must not exceed the threshold of 0.1 % volume. Groningen sales gas has a concentration of 0.00000000147 vol% (an equivalent of 20 µg/Nm³), as calculated by the NAM Laboratory in 2013. Consequently, NAM is compliant with REACH, and NAM does not have to include mercury in the Safety Data Sheets for natural gas.

GTS Status: Compliant

Best Available Technique (BAT)

NAM Status: Compliant

Reference: Reference Document for the Refining of Mineral Oil and Gas (July 2013)

Best Available Technique (BAT) is a principle in environmental legislation. The EU uses this principle to create a Best Available Technique Reference Document (BREF); a document that lays down the conclusions on current best available techniques that must be applied within a specific industry.

Specific to the natural gas producing industry is the BREF titled: "The Refining of Mineral Oil and Gas". Within this BREF, the following techniques and conclusions with regards to mercury are stipulated:

Natural Gas Plants: Techniques to reduce waste generation (Section 4.17.6)

Some of the gas fields contain mercury vapour in very low concentrations. This mercury is removed from the gas in a 'cold trap' (e.g. by gas expansion) and recovered as a mercury-containing sludge. A specialised company processes this sludge by treatment in a vacuum distillation unit.

BAT conclusions for the natural gas refinery (Section 5.12)

BAT # 43: In order to prevent emissions of mercury when present in raw natural gas, BAT is to remove it and recover the mercury-containing sludge for waste disposal.

The EU officially adopted this BAT conclusion on 9/10/2014, published in the Official Journal of the European Union.

NAM notes that there are no BAT-associated emission levels set in gas refining for mercury to air emissions, with which it must comply.

NAM executes the techniques of the BAT by using Low Temperature Separation in all of its gas streams, with waste mercury being removed and contained within sludge for treatment by a specialized company. They therefore comply with BAT #43.

GTS Status: Not Applicable

Minimization Principle: ('minimalisatieverplichte stof')

NAM Status: Compliant

Reference: Nederlandse Emissie Richtlijnen, NeR, www.infomil.nl

The Minimization Principle is legislation specific to the Netherlands, and prescribes a five step process to identify and reduce emissions to levels deemed to be both technically and economically viable.

NAM executed the assessment mandated by the Minimization Principle in 2013, as part of the Mercury Management Study 2013 (NAM GTS). This study found that NAM complies with the requirements of the minimization principle, and recorded the following conclusions:

"NAM has reviewed existing regulations related to mercury in natural gas. [...]Regarding the Minimization Principle, NAM complies by re-assessing the viability of Filter Removal every five years, along with other reduction techniques. In accordance with the NeR's guidance for applying the Minimization Principle, the latest review demonstrated that filter removal at NAM locations is not justified."

A re-assessment is needed in 2018.

GTS Status: Compliant

The Occupational Exposure Limit

NAM Status: Compliant

Reference: Directive 2009/161/EU - indicative occupational exposure limit values.

The Occupational Exposure Limit is a workplace safety standard set by the EU. It represents the maximum permissible concentration of a given substance in the air of a work place.

For mercury, the EU sets an Occupational Exposure Limit in air for a time window of 8 hours at 0.02 milligrams per cubic meter of air at 20 °C.

When burning Groningen gas in a room with a volume of 15 m³ and a ventilation rate of 2.5 turnovers/hour, one would expect a peak mercury concentration of 0.00035 milligrams per cubic meter of air. Therefore, using Groningen Gas at the workplace will not cause employers to break the Occupational Exposure Limit.

GTS Status: Compliant

Private Households: RIVM Tolerable Concentration in Air

NAM Status: Compliant

Reference: RIVM Rapport 609300021/2011

Within the Netherlands, the RIVM has adopted a Tolerable Concentration of Mercury in Air of 0.05 µg/m³ air for a lifetime exposure limit. Concentrations of mercury in a room are to be tested over a period of 24 hours and one week, in order to detect all sources of mercury and to extrapolate to a lifetime exposure level.

The NAM used a model they developed in-house to establish the threshold concentration for mercury in gas required to breach the RIVM norm in a worst case scenario. This exposure model has received a second look by DNV-GL, in order to verify the assumptions and approach taken in building the model. The threshold concentration for mercury in sales gas at which the RIVM limit is breached is 34 µg/Nm³. Groningen sales gas has a concentration of mercury in gas below this level.

GTS Status: Compliant